


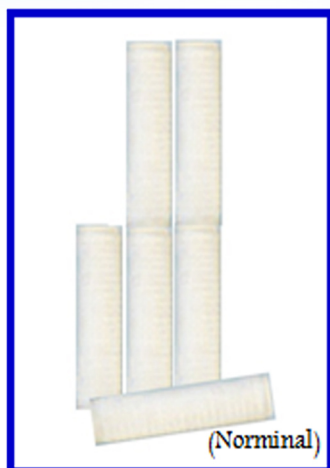

Description

Maxtron Cartridge filters is designed for high efficiency with an extended surface and long service life. The 100% polypropylene construction Provides excellent thermal and chemical compatibility. Heat bonded, continuous fiber pleated polypropylene media provides exceptional and outstanding performance.

Specification

Item	Specification
Temperature	< 70 °C
Inlet Pressure MAZ@ 25 °C	0.5 MPa
ΔP(Max)@60 °C	0.4 MPa Forward 0.2 MPa Backward
Ph	1-13

Pore size : 0.22 um, 0.45 um, 0.1 um

Dimension : OD; Ø 69 mm.

Length : 10", 20", 30", 40" (Inch)

Cartridge Adapter : 226, 222, Double Open End.


Core : 100% Polypropylene

Media : 100% Polypropylene

End Caps : 100% Polypropylene

O-Ring : Silicon, EPDM, Viton

Flow Rate Chart

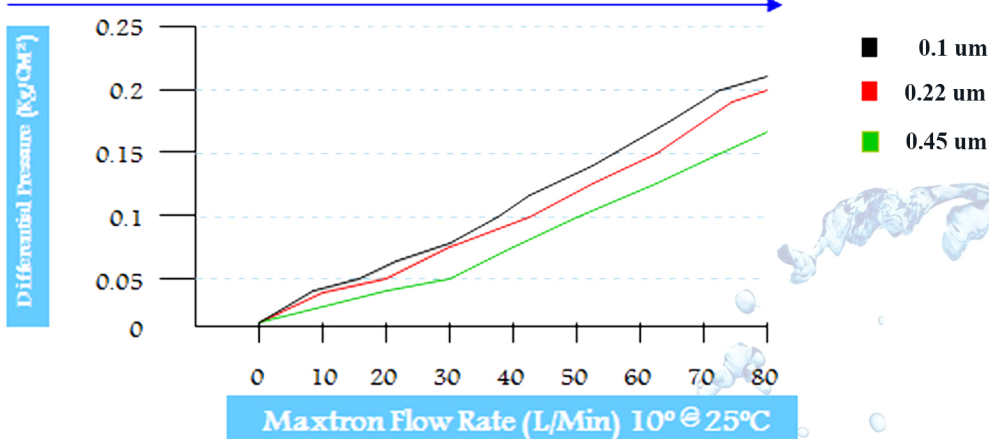

Application

- Electrical plating
- DI & RO pretreatment
- Liquid Clarification
- Pre-filter for ultra pure water
- Mineral Water
- Cosmetics
- Fine chemicals